

**DS-K5671-ZU  
Face Recognition Terminal**

The face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Face recognition terminal for turnstile
- Built-in IO output or Wiegand output to communicate with the third-party turnstile
- 7 inch LCD Touch Screen, 2 M camera
- Max. 50,000 faces, and Max. 100,000 events
- Face recognition distance: 0.3 m to 3 m; Face recognition duration < 0.2 s/User; Accuracy rate ≥ 99%
- TCP/IP, Wi-Fi communication
- Remote live view via RTSP protocol
- IP65


## ▪ Specification

Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	LCD
Video	
Lens	2
Resolution	2 MP
FOV	HFOV = 87°; VFOV = 46°
Network	
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Door contact input	1
Alarm input	2
Alarm output	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand(Hik 26bit,Hik 34bit)
USB	1
General	
Power supply	12 VDC, 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10 to 90% (no condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional
Function	
QR code recognition	Support. The dimension of the recognized QR code picture should be larger than 6 cm × 6 cm.

## ▪ Available Model

DS-K5671-ZU

▪ **Dimension**

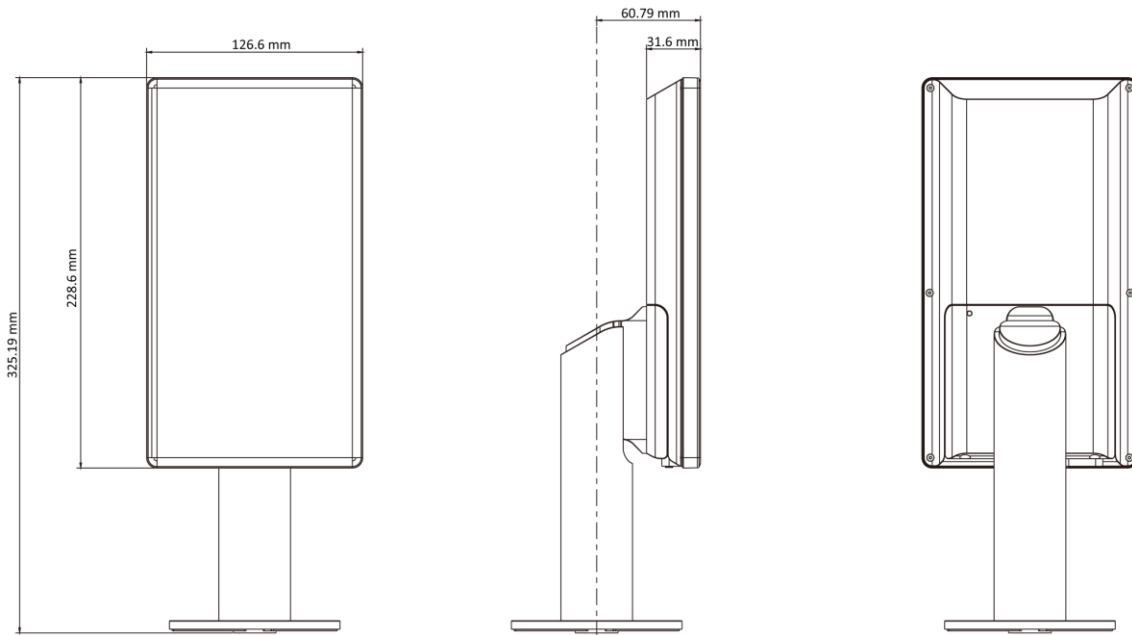

▪ **Accessory**

▪ **Optional**

<b>DS-K3B601A</b> <b>Pro Swing Barrier</b> <b>Plus</b>	<b>DS-K3B601</b> <b>Pro Swing Barrier</b>	<b>DS-K3B801</b> <b>Ultra Swing Barriers</b>	<b>DS-K3B801A</b> <b>Ultra Swing Barriers</b>	<b>DS-K3G401</b> <b>Pro Series Tripod</b> <b>Turnstile</b>
				
<b>DS-KAB5671-S</b> <b>Protective Shield</b>	<b>DS-K3B801#CD</b> <b>Ultra Swing Barriers</b>			
				